



Rivets

Semi-tubular Rivets

120° Countersunk Flat Head

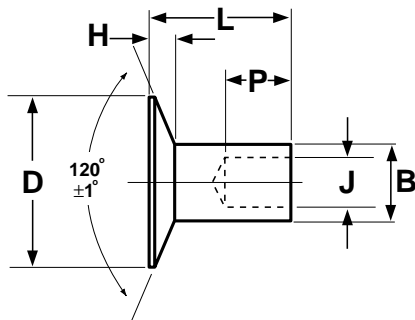

Type S

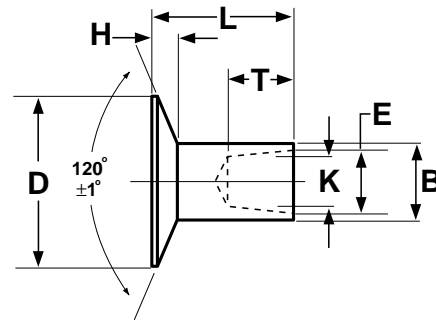

Type T

SEMI-TUBULAR RIVETS, 120° COUNTERSUNK HEAD													ANSI/ASME B18.7		
Nominal Size	B		D		H	E		K	T	J		P	Tolerance on Length		
	Shank Diameter		Head Diameter		Head Thickness	Type T Taper Hole Rivets				Type S Straight Hole Rivets			Up to and including 4 times shank dia.	Over 4 times shank dia. and up to including 8 times shank dia.	Over 8 times shank dia.
			Max, Edge Sharp	Min, Edge Rounded or Flat		Hole Dia. at End of Rivet		Hole Dia. at Bottom of Hole	Hole Depth to Start of Apex	Hole Dia. at End of Rivet		Hole Depth to Start of Apex			
	Max	Min			Ref	Max	Min	Min	Min	Max	Min	Nom			
0.089	0.089	0.085	0.223	0.203	0.039	0.068	0.064	0.050	0.057	0.068	0.062	0.064	±0.007	±0.008	±0.010
0.123	0.123	0.118	0.271	0.245	0.043	0.095	0.091	0.079	0.082	0.090	0.084	0.094	±0.007	±0.010	±0.015
0.146	0.146	0.141	0.337	0.307	0.056	0.112	0.106	0.085	0.104	0.107	0.100	0.126	±0.010	±0.012	±0.015
0.188	0.188	0.182	0.404	0.369	0.063	0.145	0.139	0.110	0.135	0.141	0.134	0.155	±0.010	±0.012	±0.015
0.217	0.217	0.210	0.472	0.430	0.075	0.166	0.158	0.136	0.151	0.163	0.155	0.189	±0.010	±0.015	±0.020
0.252	0.252	0.244	0.540	0.493	0.084	0.191	0.181	0.150	0.183	0.184	0.176	0.219	±0.010	±0.015	±0.020

Description	A small, headed metal fastener having a coaxial cylindrical or tapered hole which does not exceed 112% of the mean shank diameter in the end opposite the head. The rivet's head is countersunk at an angle of 120°.
Applications/Advantages	Easier to clinch than solid rivets. The hole reduces riveting forces for riveting tooling while the remaining clinched solid shank can provide comparable shear strengths to other common riveting products. The 120° countersunk head provides a smooth offside surface and sufficient clearance for moving parts which pass over the rivet head. The fastener is installed with a riveting hammer.
Material	Steel: Low carbon steel (containing 0.1% carbon or less) Aluminum: Grades 5056, 1100, 2017, 2117 or 6053